

Accessories electrical & manual wire rope winches

Wire rope pulley block DSRB, sheave DSR, standard wire ropes



DSRB 270



DSR 400






Standard wire rope

Technical data and dimensions: wire rope pulley block DSRB

Model	Art. no.	D Ø	Rope Ø	Dm Ø	FEM	Max. tensile load at deflection		Ball bearing	Dimensions in mm								
		[mm]	[mm]	[mm]	FEM	90°	180°		D ₁ Ø	L	C	H	B	E	S	K	M/M ₁ Ø
DSRB 90/4	33447103	90	3-4	80	2m	700	500	6004ZZ	20	120	90	134	85	62	4	65	9/9
DSRB 90/6	33447413	90	5-6	78	1Dm	700	500	6205ZZ	25	120	90	134	85	62	6	65	9/9
DSRB 145/7	33447106	145	7	126	1Am	1100	800	6306ZZ	25	200	160	224	125	88	6	110	11.5/13
DSRB 185/8	33447107	185	8	160	2m	2300	1630	6306ZZ	30	245	195	273	138	106	8	135	13.5/15
DSRB 270/12	33447111	270	9-12	246	2m	2500	1800	6208ZZ	40	360	290	407	191	138	10	202	18/20
DSRB 400/16	33447113	400	13-16	368	3m	5000	3800	6310ZZ	50	530	430	612	302	212	15	310	26/30
DSRB 490/20	33447115	490	20	450	3m	8000	6000	6313ZZ	65	650	580	694	313	220	16	340	34/40

On request, all wire rope pulley blocks are also available individually.

Also available according to directive 2014/34/EU (ATEX).

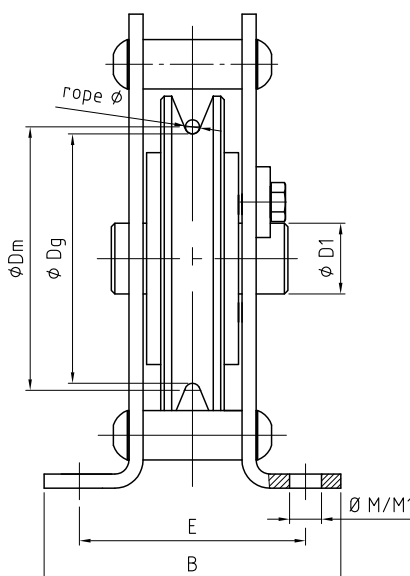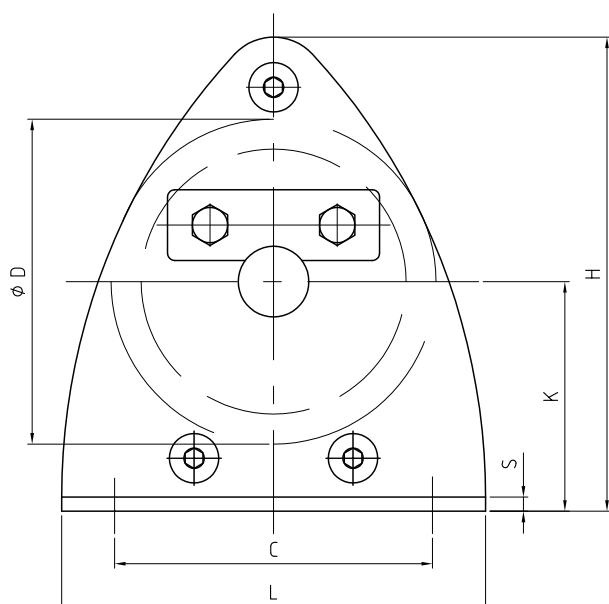

CAD & go

