

## ROV Shackle Model No. 8-911



### Main Features

- Forged alloy steel, quenched and tempered
- Designed specifically for ROV application
- Individually stamped with the Working Load Limit
- Shackle Bows are painted yellow to ensure ease of sight in water

### Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



### Technical Data

Product Code	Nominal Size		Capacity (tonnes)	Dimensions (mm)										Net Weight (kg)
	inch	mm		A	E	H	O	P	Q	S	T	W		
8-911-22	7/8	22	6.5	86	58	148	50	63	30	19	10	38	1.8	
8-911-26	1	26	8.5	96	69	166	50	65	30	20	10	44	2.5	
8-911-28	1 1/8	28	9.5	111	74	190	70	88	35	21	12	46	3.6	
8-911-32	1 1/4	32	12.0	121	84	210	70	88	35	25	12	54	4.8	
8-911-36	1 3/8	36	13.5	134	92	232	75	96	40	27	15	59	6.8	
8-911-38	1 1/2	38	17.0	146	99	254	75	98	40	27	15	60	8.3	
8-911-45	1 3/4	45	25.0	178	127	313	90	114	50	30	20	73	16.6	
8-911-50	2	50	35.0	197	146	347	106	132	60	30	20	83	23.4	

Other sizes available - please ask for details.

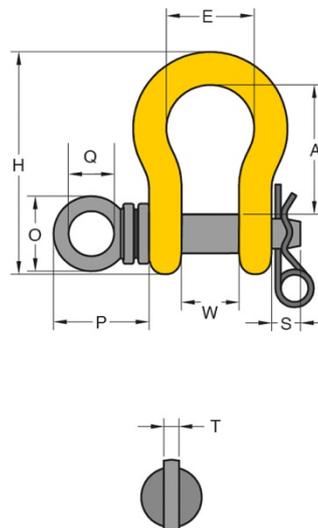

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

**Our innovation, your safety**