

ACCESS SAFETY PLATFORMS TYPE MB-F / MB-K IV

Access Safety Platforms ensure safety for repairs and maintenance work



- number of persons permitted: 2
- with automatic door latch
- fork sleeves with safety mechanism to prevent slipping
- "DGUV" compliant (German Use of Work Equipment Directive) and approved by the German Association for Technical Inspection "TÜV"
- PPE anchor points (personal protective equipment)

Types available


MB-F

- folding construction
- in just a few steps the platform is ready for use
- galvanized tool deposit
- picked up broadside by a forklift truck

Accessories

- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake
- construction height 225 mm

Fork sleeve inside dimensions in mm

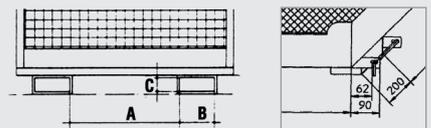

MB-F

MB-K-IV

- pick up by crane
- according to DIN EN 14502-1
- load capacity 300 kg
- support legs, 135 mm ground leeway
- galvanized roof
- galvanized tool deposit inside
- standard includes a 4-leg chain



MB-K-IV

| | Dimensions (l x w x h) in mm | Floor area in mm | Total permitted weight in kg | Weight in kg paint. / galv. | Fork sleeve inside dimensions in mm | | |
|---------|---------------------------------|---------------------|---------------------------------|--------------------------------|-------------------------------------|-----|----|
| | | | | | A | B | C |
| MB-F | 1275 x 1210 x 1995 | 1000 x 1200 | 300 | 122 / 131 | 600 | 200 | 80 |
| MB-K-IV | 815 x 1200 x 2305 | 800 x 1200 | 470 | 170 / 183 | - | - | - |

Finish:

RAL 2000